


illusion
leather



82417 / Cust / Custard

u0isn!i

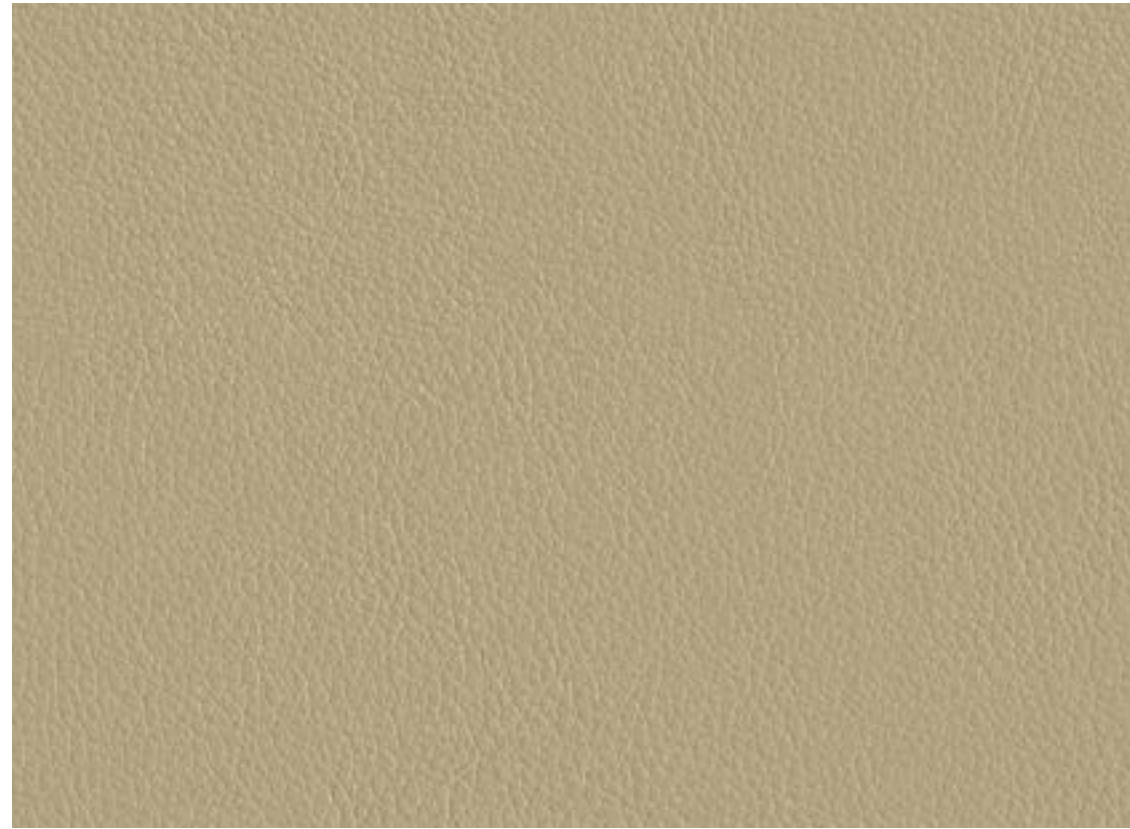

93086 / Blus / Blush



53593 / Nimb / Nimbus



22427 / Peny / Peony



65072 / Llac / Lilac

u0isn!i



72133 / Paue / Paleaque




63174 / Ciel / Ciel



61602 / Babl / Baby Blue



65307 / Viol / Violet



74007 / Lign / Lindegreen



76236 / Gren / Green



00800 / Whit / White



84176 / Crpe / Crepe



85352 / Dest / Desert



87241 / Taup / Taupe



36519 / Sand / Sand




44184 / Buck / Buckskin



24784 / Clar / Claret



45633 / Cinn / Cinnamon



57841 / Grey / Grey




48013 / Choc / Chocolat



46508 / Mink / Mink




47124 / Cbou / Caribou



67403 / Purp / Purple




68523 / Blry / Blueberry




58290 / Ston / Stone



68746 / Blue / Blue




65066 / Bird / Bird



67382 / Tile / Tile

u0isn!i



00110 / Bck / Black



83430 / Beig / Beige



85020 / Caml / Camel



44388 / Dkca / Dark Camel




36850 / Murd / Mustard




23660 / Chry / Cherry




28040 / Boux / Bordeaux



75566 / Cobt / Cobalt



76725 / Petr / Petrol



77773 / Dkgn / Dark Green



66745 / Mrne / Marine



57069 / Ligy / Light Grey

Illusion - Imitation leather

Imitation leather from PU (Polyurethane) is hard-wearing and easy to maintain which makes it particularly well suited to public spaces, such as restaurants, cafés and lounges. Imitation leather is also a good option for healthcare settings and public spaces where furniture and fittings require frequent and thorough cleaning.

Thickness (mm)	1 +/-0,1
Martindale	500.000 (EN ISO 5470-2)
Flexing Endurance	50.000 (EN ISO 5402-1)
Lightfastness (scale 1-8)	≥7 (EN ISO 105-B02)
Rubbing Dry (scale 1-5)	4-5 (EN ISO 105-X12)
Rubbing Wet (scale 1-5)	4-5 (EN ISO 105-X12)
Tensile Strength Warp (N/cm)	506/5 (ISO 1421)
Tensile Strength Weft (N/cm)	347/5 (ISO 1421)
Tear Strength Weft (N)	58 (ISO 4674-1)
Tear Strength Warp (N)	56 (ISO 4674-1)
Seam Slippage Warp (N)	200 (ISO 13936-1)
Seam Slippage Weft (N)	200 (ISO 13936-1)
Adhesion - Surface Finish Warp (N/cm)	35,8/5 (ISO 2411)
Adhesion - Surface Finish Weft (N/cm)	28,9/5 (ISO 2411)
Cold Cracking Resistance (°C)	-40 (EN 1876-1)
Tropical Rest (weeks)	10 (ISO 1419)
Fire Test	BS 5852 Crib 5, Cal TB 117, DIN 4102 B2, EN 1021-1 & 2, IMO 2010 FTP Code Part 8

Be aware that the tones of digital color cards can vary from device to device. We suggest that you review a physical color sample of your selected color prior to proceeding with your order.