

A close-up photograph of a woven fabric, likely a textile or mesh, with a repeating pattern of green and brown threads. The fabric is curved, creating a sense of depth and texture. The lighting is soft, highlighting the intricate details of the weave.

ROHI

NOVUM

NOVUM




snow



angora




moon



stone



cocos




kies




paradise




cacao




plaza



santos




flamingo



prime




lagoon



pear




delphi



pepper




ebony



lanoso



carbon

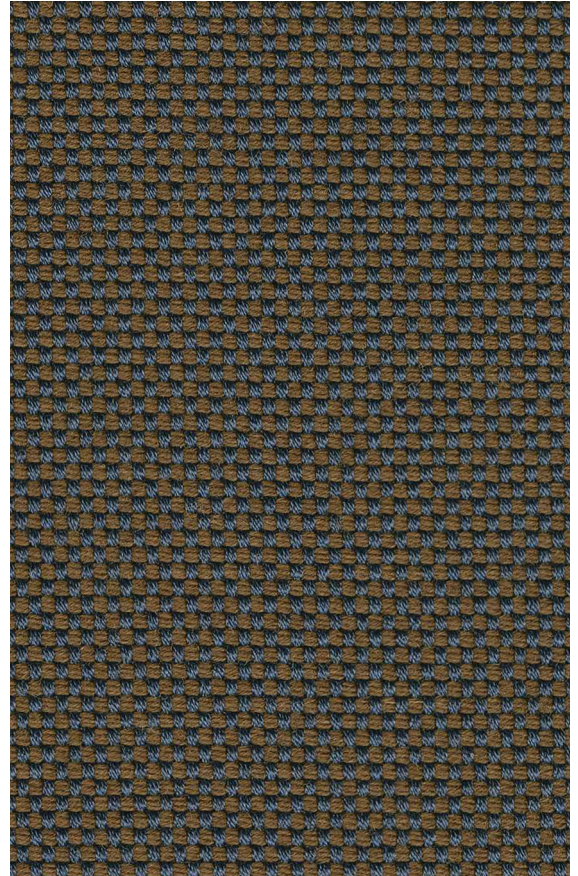

lord




azur



blues




samoa




pinie




rosewood




seed




moss




tivoli



amur




prisma



mambo



prune



viola




magenta

NATURAL MATERIAL
SOFT TOUCH
HIGHEND QUALITY
YARN DYED
VIRGIN WOOL
DESIGN
MANUFACTURE
EASY CARE
LASTING VALUE




heart



sunset




terra



litchi



curry



coral

ROHI

GEWEBEBESCHREIBUNG

Dessin: NOVUM
Material: 96% Schurwolle 4% Polyamid
Gewicht ca.: 660 g/m² - 990 g/lfm
Breite ca.: 150 cm

QUALITÄTSBESCHREIBUNG

Scheuerfestigkeit: 90.000 Touren ISO 12947-2
Lichtdurchlässigkeit: DIN EN 410
Lichtechtheit: ≥ 5 ISO 105-B02 (Garnfärbung)
Pilling: ≥ 4-5 ISO 12945-2

reine Schurwolle – Kammgarnqualität
pflegeleicht, atmungsaktiv und schmutzabweisend
langlebig, hoch strapazierfähig
Garnfärbung für bestmögliche Farbbrillanz
und hohe Lichtechtheit
nicht direkter Sonneneinstrahlung aussetzen
Produktion und Design in Deutschland seit 1933

FLAMMSCHUTZ

Wolle ist von Natur aus schwer entflammbar
rohi Wollstoffe erfüllen folgende Normen
ohne zusätzliche Flammschutzrüstung:
CAL TB 117 – 2013
DIN EN 1021-1/-2
BS 5852 Part 1: 1979
UNI 9175 1 IM
IMO 2014/90/EU Schiffsausrüstungsrichtlinie
mit optionaler Flammschutzrüstung:
BS 5852: 2006 Crib5
DIN 4102-1 B2
DIN EN 13501-1 E
FAR 25.853 12 Sek. vertikal

AKUSTIK

Strömungswiderstand: $R_s = 1199$ Pa s/m DIN EN 29053
Schallabsorption gerafft: $\alpha_w = 0,95/ A$ ISO 11654

ÖKOLOGIE

natürlich nachwachsender Rohstoff
IWTO Guidelines for Wool Sheep Welfare
RAL DE-UZ 117 Anl. 3b für „Blauer Engel“
ohne Flammschutz
AB 2998 (US Export Norm)
REACH (EU Export Norm)

WEITERE MERKMALE

Spezialausrüstung gegen Schrumpfung und Pillingneigung
Dimout Option auf Anfrage
individuelle Stoffentwicklung
für Architektur- und Designkonzepte
Sonderfarben ab 25 lfm

DESCRIPTION OF FABRICS

Design: NOVUM
Content: 96% virgin wool 4% polyamide
Weight approx.: 660 g/m² - 990 g/lm
Width approx.: 150 cm

QUALITY DETAILS

Abrasion: 90.000 rubs ISO 12947-2
Light transmission: DIN EN 410
Lightfastness: ≥ 5 ISO 105-B02 (yarn dyed)
Pilling: ≥ 4-5 ISO 12945-2

virgin wool – worsted yarn quality
easy care, breathable and stain-resistant
durable, hard-wearing
yarn dyed for brilliant colours and
good lightfastness
don't expose to direct sunlight
production and design 'Made in Germany' since 1933

FLAME RESISTANCE

wool is naturally flame retardant
rohi wool fabrics satisfy the following standards
with no additional flame retardant finish:
CAL TB 117 – 2013
DIN EN 1021-1/-2
BS 5852 part 1: 1979
UNI 9175 1 IM
IMO 2014/90/EU Marine Equipment Directive (MED)
with additional flame retardant finish:
BS 5852: 2006 Crib5
DIN 4102-1 B2
DIN EN 13501-1 E
FAR 25.853 12 sec. vertical

ACOUSTIC

Flow resistivity: $R_s = 1199$ Pa s/m DIN EN 29053
Sound absorption folded: $\alpha_w = 0,95/ A$ ISO 11654

ECOLOGY

natural, renewable material
IWTO Guidelines for Wool Sheep Welfare
RAL DE-UZ 117 Att. 3b for "Blue Angel"
without flame retardant
AB 2998 (US export standard)
REACH (EU export standard)

MORE FEATURES

special finish: anti-shrink, anti-pilling
dimout option on request
development of individual fabrics for
architects' and designers' concepts
special colours from 25 lm



aktuellste Spezifikationen /
latest specifications:
rohi.com/novum